

Advanced Protective Coating & Adhesive

MAXIVE®

Superior Gas Barrier Resin



MAXIVE® Advantages

- Excellent **Gas Barrier Properties**
- High **Chemical Resistance**
- Strong **Adhesive** with Variety of Films
- Improve **Processability & Clarity**

Composition & Applications

MAXIVE® Composition			
Component	Material	Color	Viscosity
A	Poly Epoxy Resin	Clear Liquid	2000mPa•s
B	Polyamine Resin	Clear Liquid	1300mPa•s

Can be used in various applications where Excellent **Gas Barrier** & **Chemical Resistance** are required



Adhesive for Barrier Film


3 IN 1 SYSTEM

- *Alternative for conventional gas barrier films*
- *Eliminate need for Urethane Adhesive and Barrier Layers.*



Excellent Pinhole Resistance

Better Pinhole Resistance = **Better O₂ Barrier**

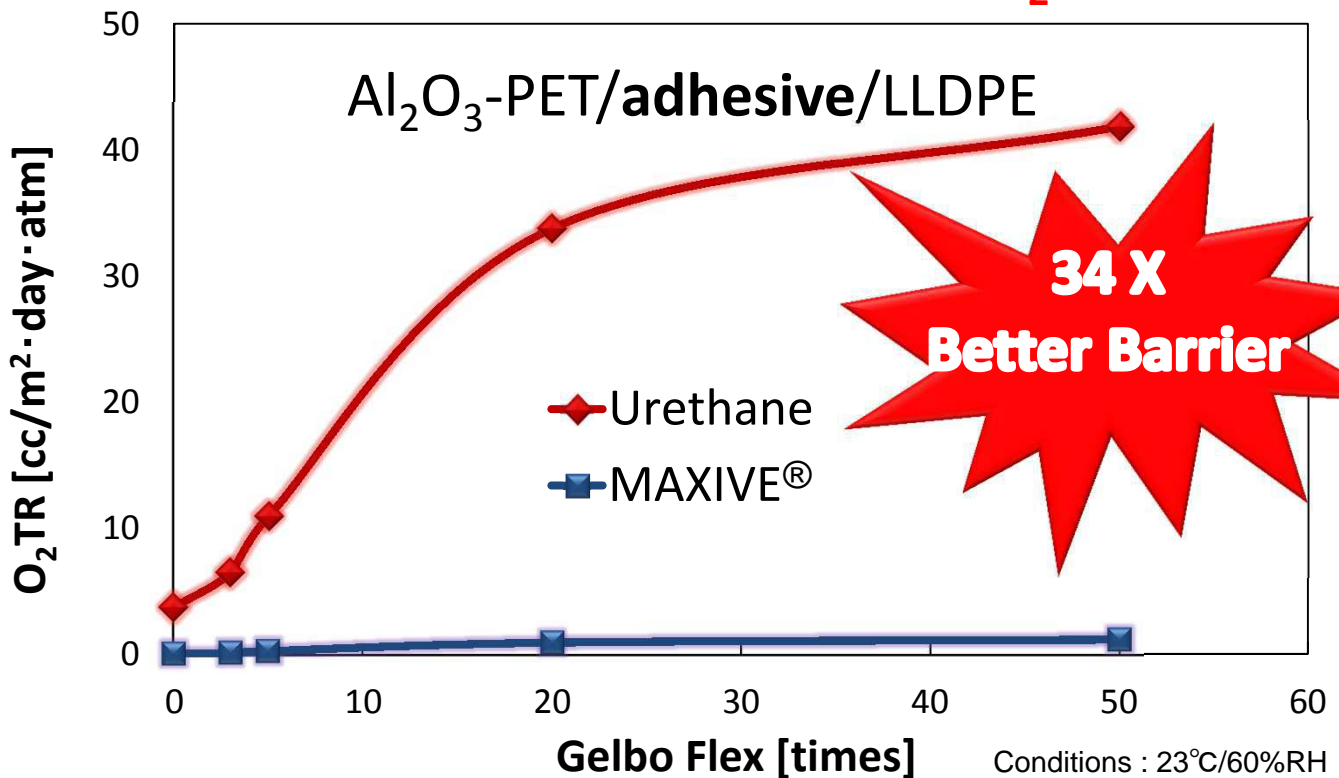

MAXIVE®: Epoxy Resin Coating

Gives Gas Barrier Properties to Various Materials



PE, PP & PET containers

Electronics

Gas	Unit	Maxive ¹	Typical Epoxy Resin ¹	EVOH ²	Conditions
Oxygen	cc · mm / m ² · day · atm	0.03	3	0.01	23°C/60%RH
		0.04	–	0.09	23°C/80%RH
		0.06	–	1	23°C/90%RH
Hydrogen		6.5	–	–	23°C/0%RH
Water Vapor	g·mm/m ² ·day	0.2	0.7	0.7	40°C/90%RH
Fuel		0.05	–	0.18	60°C

1. Curing conditions: 80°C / 30 min, 2. Ethylene 32mol%, monolayer film

Contact Information

www.aromaticchemicals.com



Japan

Mitsubishi Gas Chemical Co., Inc.

Phone: +81-3-3283-4754

E-Mail: mxda@mgc.co.jp

China

Shanghai Ryoyo Trading Co., Ltd.

Phone: +86-21-5228-0585

E-Mail: fengqiaojie@ryoyotrading.com

Europe

Mitsubishi Gas Chemical Europe GmbH

Phone: +49-211-363 080

E-Mail: contact@mgc-europe.de

USA

Mitsubishi Gas Chemical America, Inc.

Phone: +1-212-687-9030

E-Mail: contact@mgc-a.com

Singapore

Mitsubishi Gas Chemical Singapore Pte. Ltd.

Phone: +65-6224-0059

E-Mail: contact@mgcs.com.sg

Thailand

MGC Trading Thailand Ltd.

Phone: +66-2-670-3417

E-Mail: contact@mgc.co.th